

High Reliability 1.4-inch (35.6×25.4) 10×14 2mm Dot Matrix LED Displays

SDM-2147


GENERAL DESCRIPTION

The SDM-2147 (cathode column) series are a high performance epoxy resin molded 35.6×25.4mm ϕ 2.0 dot matrix LED displays. The standard units are available in red, orange and yellow-green emitting colors with 14×10 array, x-y select, and constructed with black face and milky white segment color.


FEATURES

1. High brightness with high contrast
2. Wide angle viewing
3. Low power consumption;
Directly drive with I.C
4. Solid state reliability;
Long operation life

PACKAGE DIMENSIONS

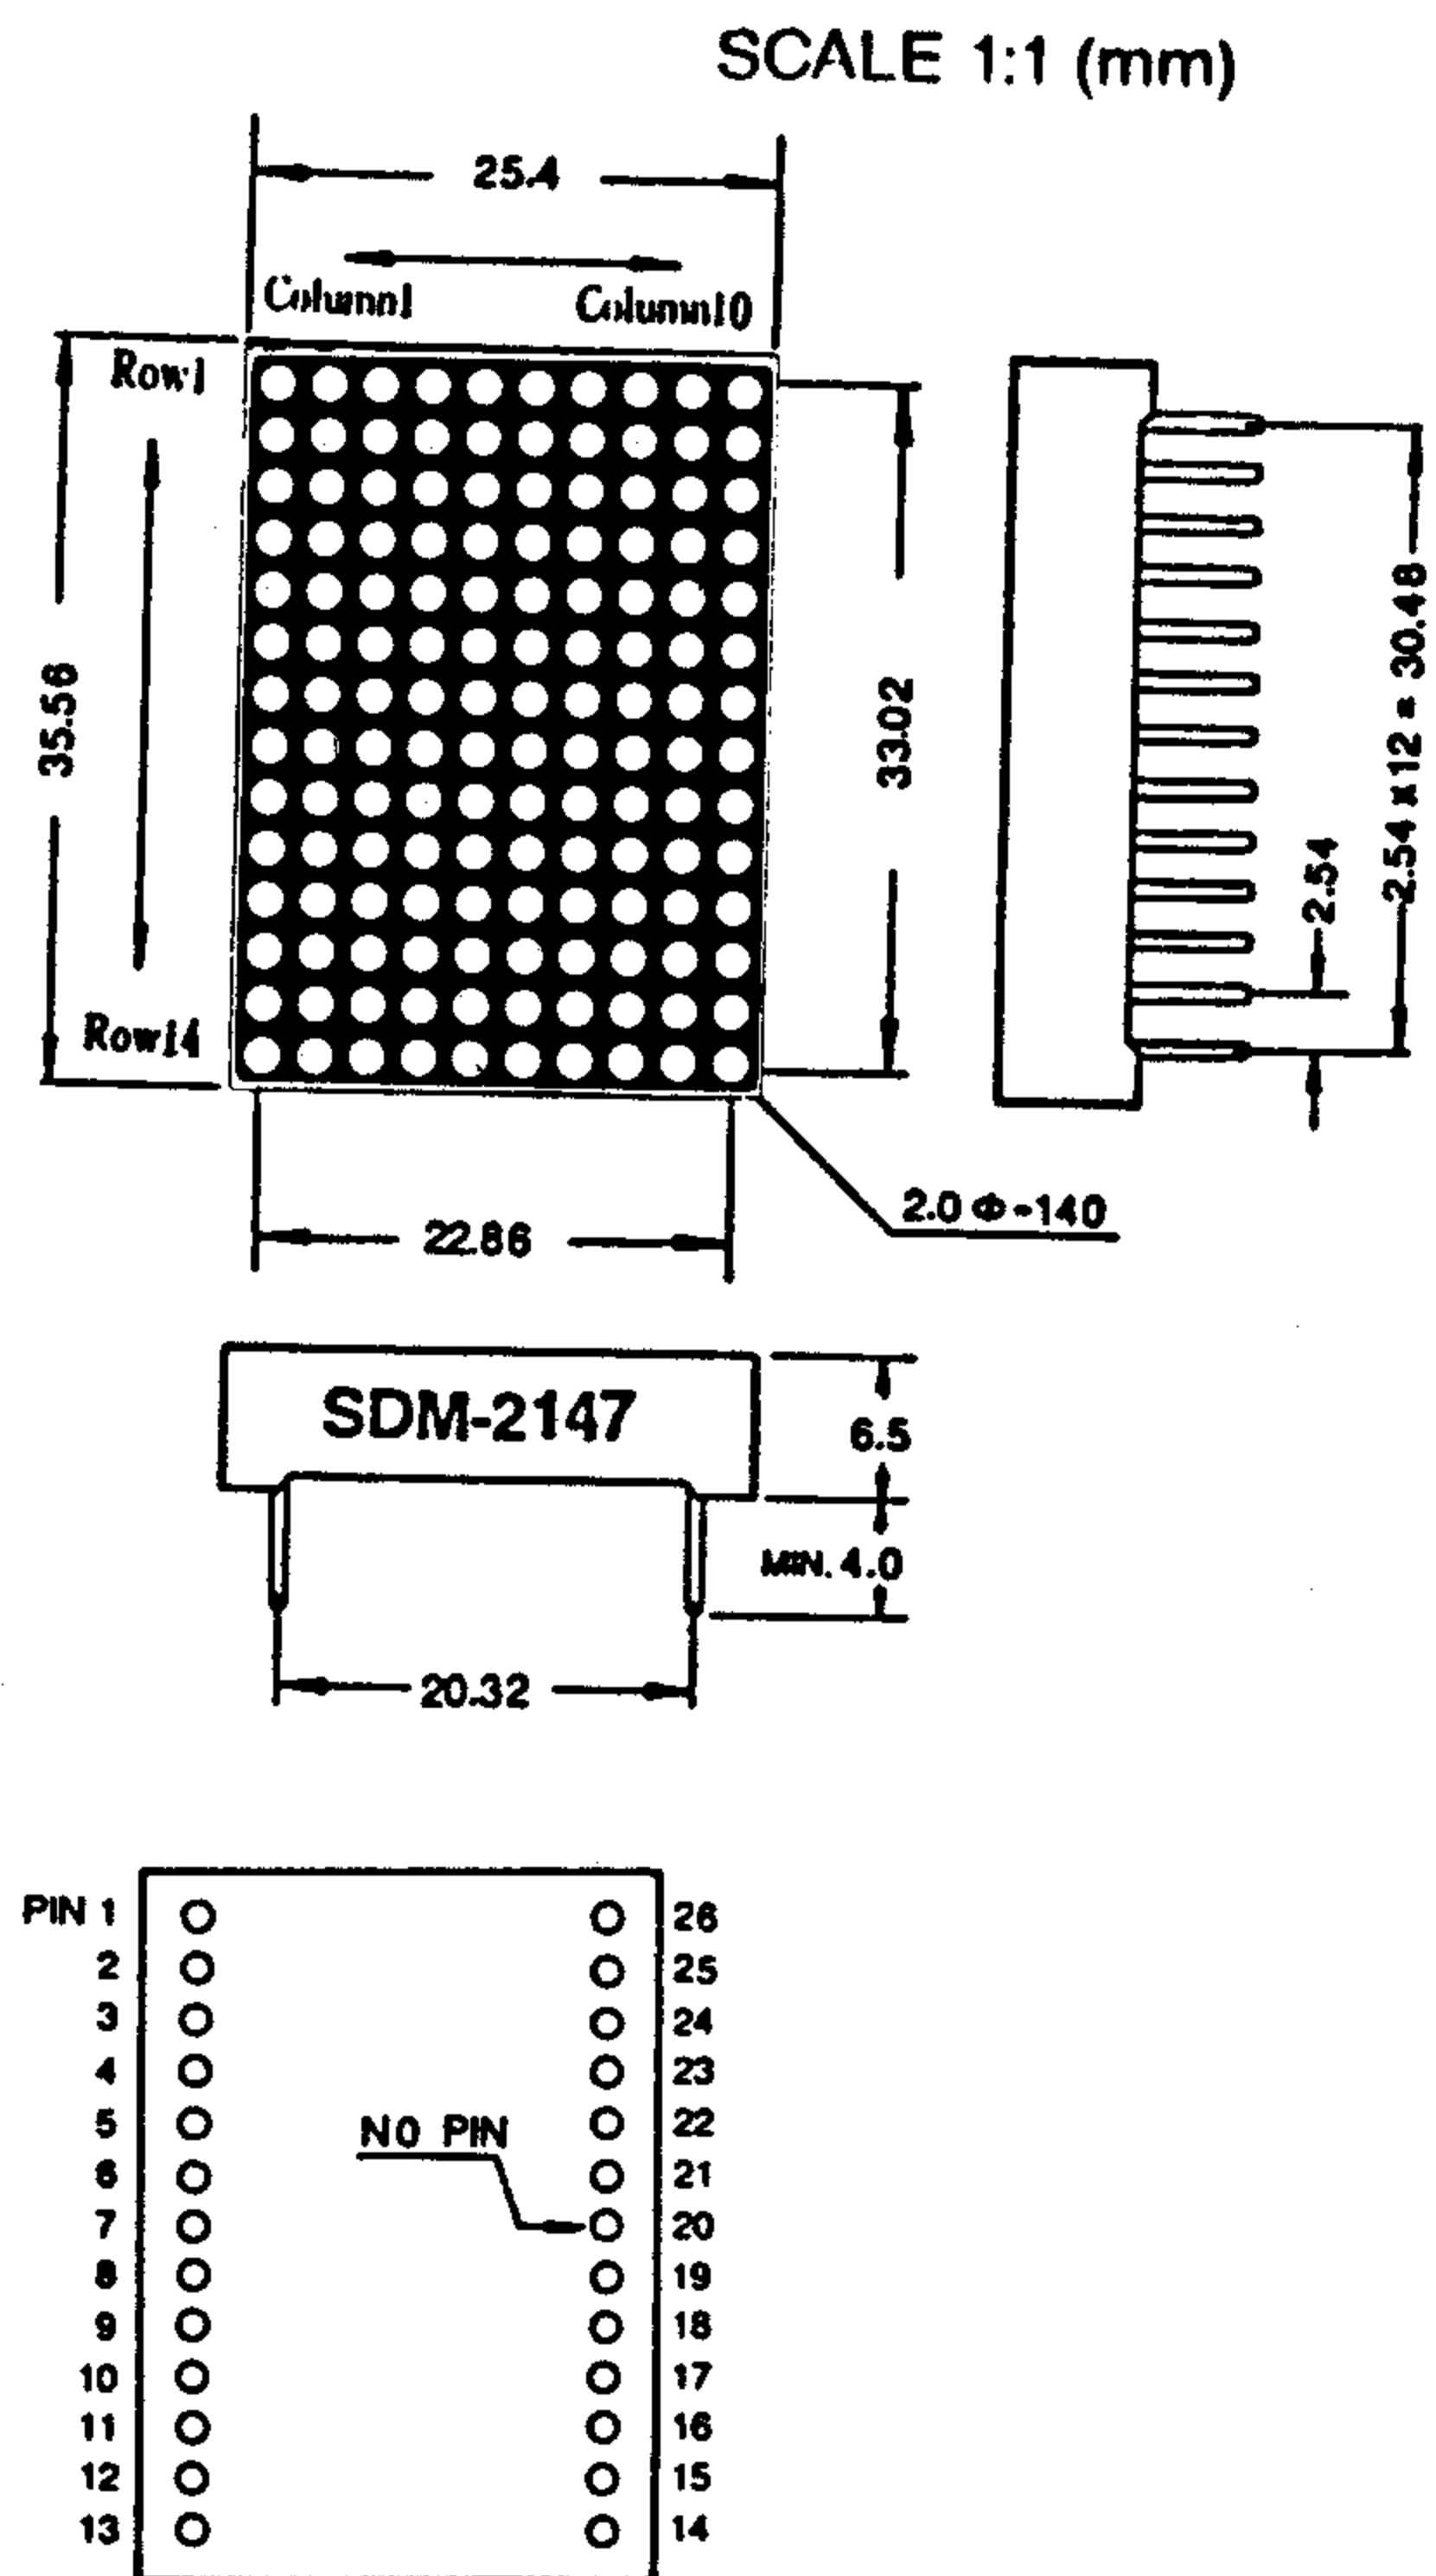

PIN ARRANGEMENT (Top View)

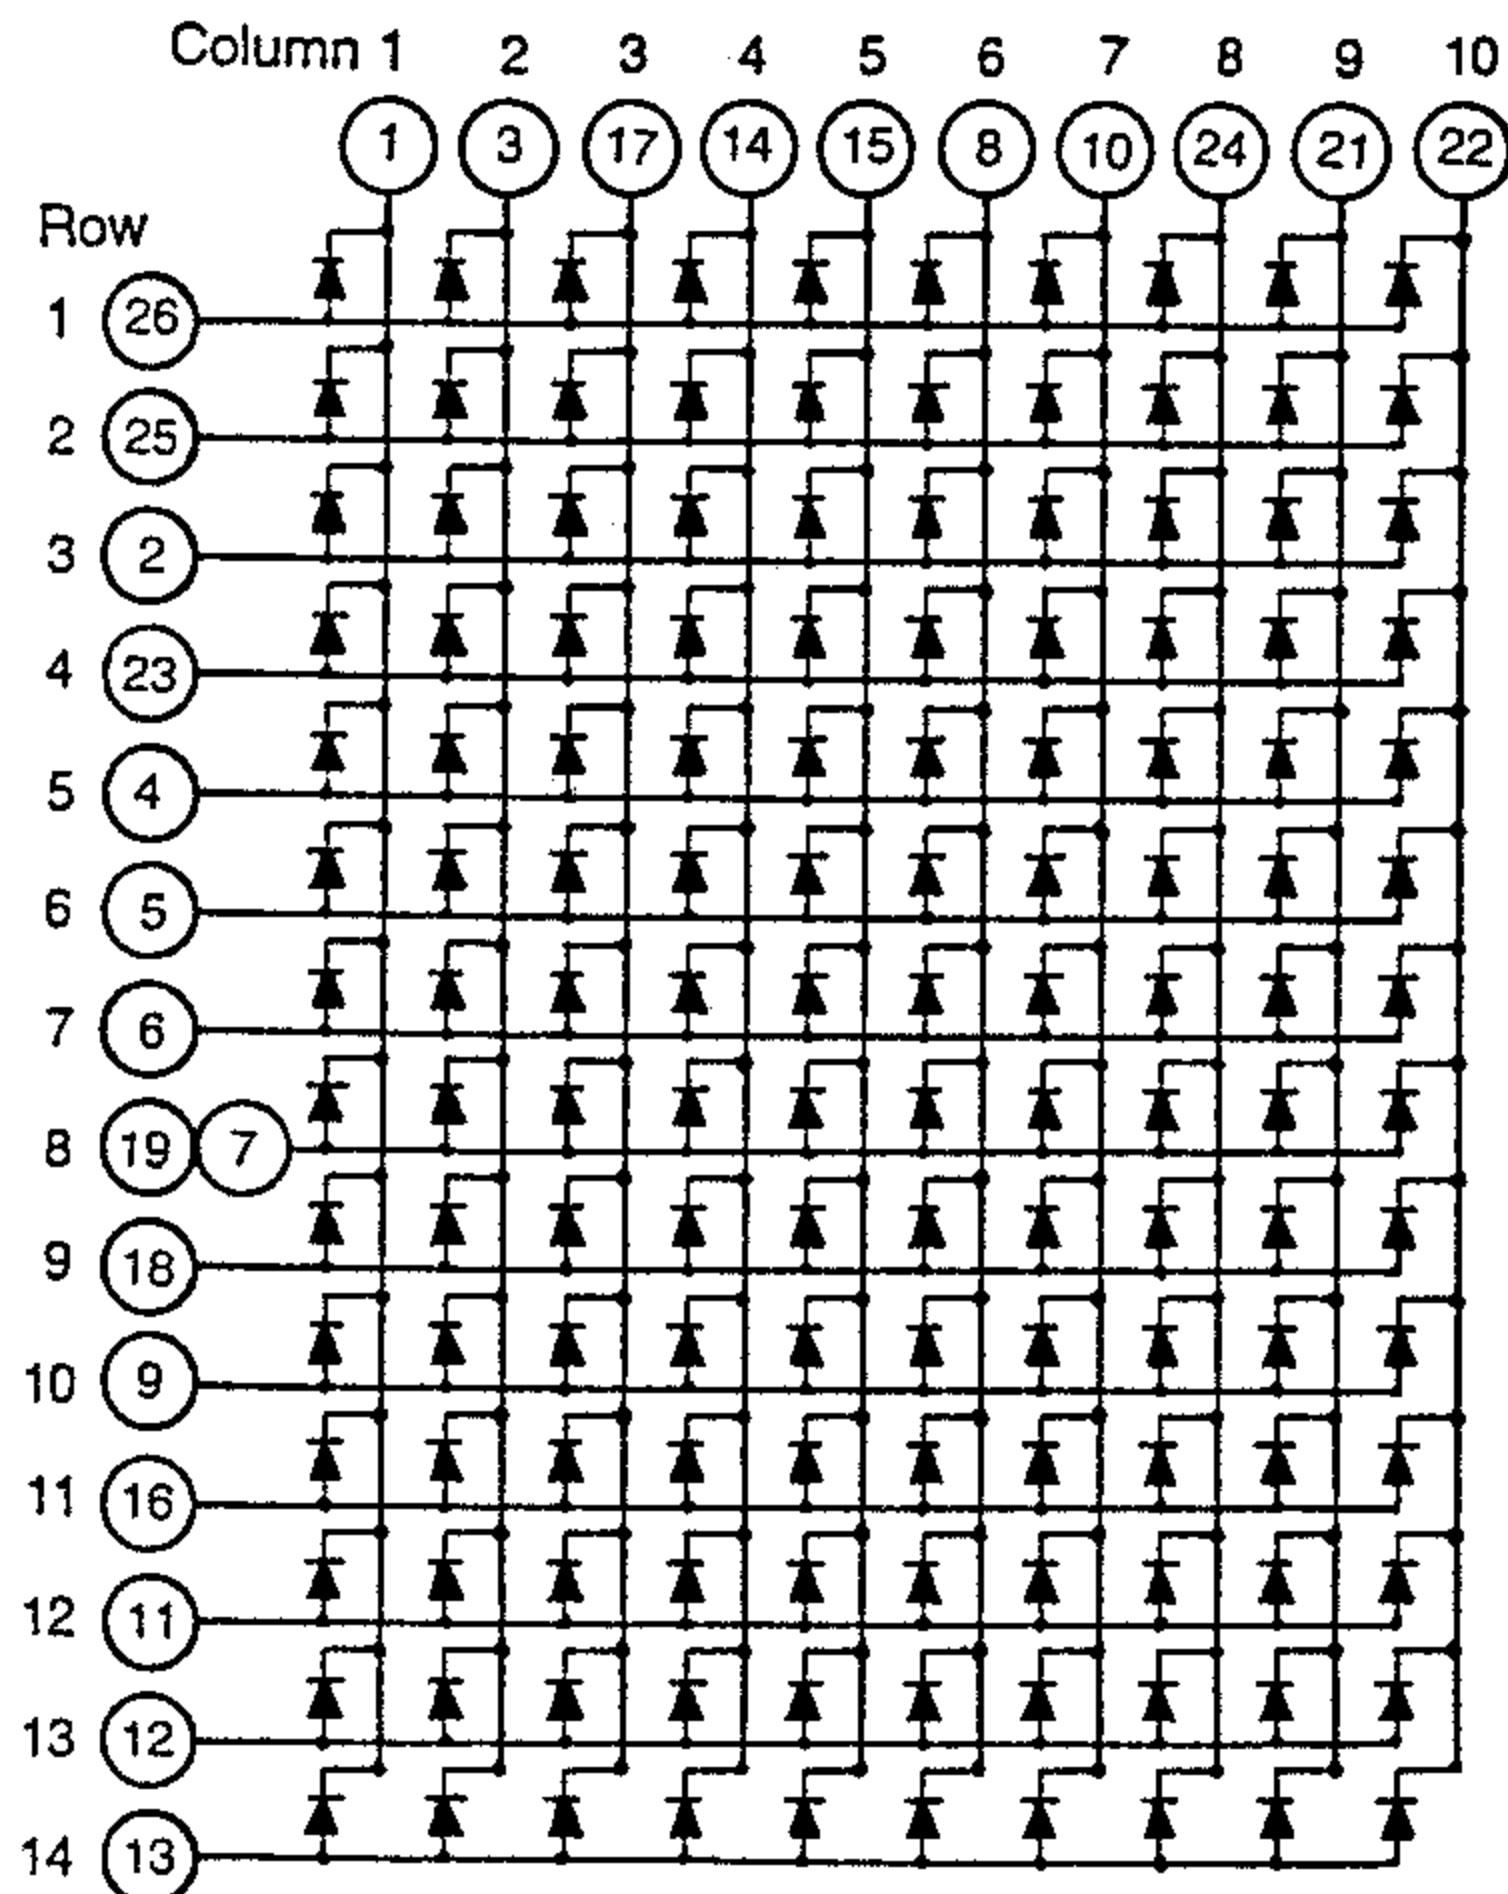

三光半導體株式會社
SAM KWANG SEMICONDUCTOR CO., LTD.

803 Silla Techno Vil., 39-3 Dang-dong Kunpo-City Kyungki-do, Korea,
TEL:031-456-1444/1484, FAX:031-456-4224

Red SDM 2147R (GaP)

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Power dissipation/Total	2000	mW
Power dissipation/Dot	20	mW
Forward current	10	mA
Peak forward current	60*	mA
Reverse voltage	4	V
Operating temperature	-25 ~ +85	$^\circ\text{C}$
Storage temperature	-55 ~ +100	$^\circ\text{C}$

Electrical/Optical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Conditions	Min	Typ	Max.	Unit
Forward voltage/Dot	V_F	$I_F = 10\text{mA}$	—	2.1	2.3	V
Reverse current/Dot	I_R	$V_R = 4\text{V}$	—	—	10	μA
Luminous intensity/Dot	I_V	$I_F = 10\text{mA}$	400	700	—	μcd
Peak wavelength	λ_P	$I_F = 10\text{mA}$	—	700	—	nm
Spectral line halfwidth	$\Delta\lambda$	$I_F = 10\text{mA}$	—	30	—	nm

Orange SDM 2147SR (GaAsP/GaP)

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Power dissipation/Total	2000	mW
Power dissipation/Dot	20	mW
Forward current	10	mA
Peak forward current	60*	mA
Reverse voltage	4	V
Operating temperature	-25 ~ +85	$^\circ\text{C}$
Storage temperature	-55 ~ +100	$^\circ\text{C}$

Electrical/Optical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Conditions	Min	Typ	Max.	Unit
Forward voltage/Dot	V_F	$I_F = 10\text{mA}$	—	2.0	2.2	V
Reverse current/Dot	I_R	$V_R = 4\text{V}$	—	—	10	μA
Luminous Intensity/Dot	I_V	$I_F = 10\text{mA}$	600	1300	—	μcd
Peak wavelength	λ_P	$I_F = 10\text{mA}$	—	635	—	nm
Spectral line halfwidth	$\Delta\lambda$	$I_F = 10\text{mA}$	—	35	—	nm

Yellow-green SDM 2147UG (GaP)

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Power dissipation/Total	2000	mW
Power dissipation/Dot	20	mW
Forward current	10	mA
Peak forward current	60*	mA
Reverse voltage	4	V
Operating temperature	-25 ~ +85	$^\circ\text{C}$
Storage temperature	-55 ~ +100	$^\circ\text{C}$

Electrical/Optical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Conditions	Min	Typ	Max.	Unit
Forward voltage/Dot	V_F	$I_F = 10\text{mA}$	—	2.1	2.3	V
Reverse current/Dot	I_R	$V_R = 4\text{V}$	—	—	10	μA
Luminous intensity/Dot	I_V	$I_F = 10\text{mA}$	500	1200	—	μcd
Peak wavelength	λ_P	$I_F = 10\text{mA}$	—	565	—	nm
Spectral line halfwidth	$\Delta\lambda$	$I_F = 10\text{mA}$	—	30	—	nm

Red SDM 2147UR (GaAlAs)

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Power dissipation/Total	2000	mW
Power dissipation/Dot	20	mW
Forward current	10	mA
Peak forward current	60*	mA
Reverse voltage	4	V
Operating temperature	-25 ~ +85	$^\circ\text{C}$
Storage temperature	-55 ~ +100	$^\circ\text{C}$

Electrical/Optical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Conditions	Min	Typ	Max.	Unit
Forward voltage/Dot	V_F	$I_F = 10\text{mA}$	—	1.85	2.1	V
Reverse current/Dot	I_R	$V_R = 4\text{V}$	—	—	10	μA
Luminous Intensity/Dot	I_V	$I_F = 10\text{mA}$	1800	3000	—	μcd
Peak wavelength	λ_P	$I_F = 10\text{mA}$	—	660	—	nm
Spectral line halfwidth	$\Delta\lambda$	$I_F = 10\text{mA}$	—	20	—	nm

* Pulse Width 1 ms
Duty Cycle 1/5